VT-190-FSZ

MAN WB 3300/3600 MM / MB ATEGO WB 3320 MM / IVECO WB 3690 MM

VT-190-FSZ

SPECIFICATION	VT-51-LF
Working height	19.0 m
Platform height	17.0 m
Max. working outreach	12.0 m
Max. bucket capacity	200 kg
Flyboom	200°
Minimum GVW of the vehicle	7490 kg

* Depending on vehicle

STANDARD

- PTO driven hydr. Pump
- 1 set extendable- and 1 set H-outriggers
- OBI: Outrigger boom interlock
- ES: Emergency pump system
- 2 Man Euro bucket
- VP: 230 V connection to platform
- Bucket center stowe without platform
- FPC: Full proportional CANbus control
- Display in bucket [1)]
- MOS:Max. outreach sytem (lenght/angle)
- NLU: Night light in uppercontrol
- 1 KV insulation

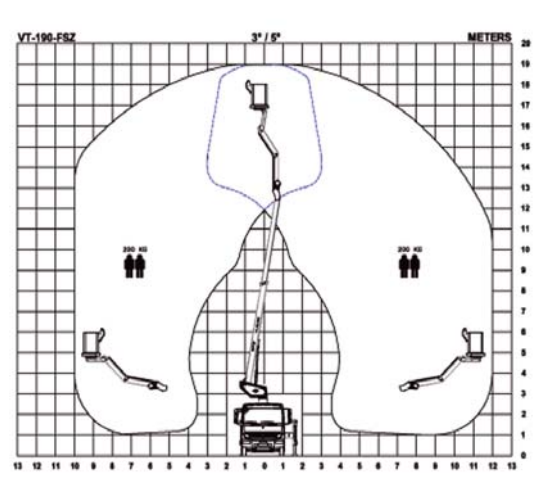

OPTIONS

- 2 man Aluminium walk-in bucket
- 2 man extendable bucket
- AB: Airline to bucket
- PSA: Rearplatform, bucket stowed in center
- 24 V/230 V Inverter
- AEP: Access Enviromental Powerpack
- LRA: Limited Rotation Working Area
- OLS: Outreach Load Sensing System
- TSS: Tilt Sensing System
- ADS: Access drive system

NOTE

[1)] Display of the reach (position) with working height and outreach, error diagnosis

VT-190-FSZ/C600/2012-02/DE

TIME INTERNATIONAL A/S
Søndervang 3 - DK-9640 Farsø
Phone +45 9863 2433 - Fax +45 9863 2483
sales@TIMEintl.dk - www.TIMEintl.dk